

PTE 1009A - 1012A

Open koeltorens


Technische gegevens

REMARK: Do not use for construction. Refer to factory certified dimensions & weights. This page includes data current at time of publication, which should be reconfirmed at the time of purchase. In the interest of product improvement, specifications, weights and dimensions are subject to change without notice.

[PTE cooling tower performance at standard conditions](#)

Laatst bijgewerkt: 24/08/2024

PTE 1009A - 1012A

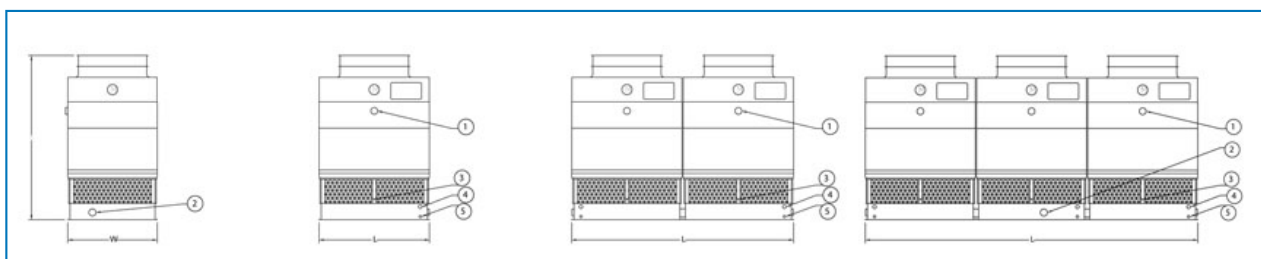

1. Water in; 2. Water uit; 3. Make-up; 4. Overloop; 5. Afvoer.



Model	Gewicht (kg)			Afmetingen (mm)			Luchtdebi et (m ³ /s)	Ventilator motor (kW)	Vloeistof nlaat ND (mm)	Vloeistof itlaat ND (mm)	Suppletie ND (mm)
	Bedrijfsge wicht (kg)	Transport gewicht (kg)	Zwaarste gedeelte (kg)	L	W	H					
PTE 1 009A-3 K-L1	3940	2780	1100	2737	2997	4530	22.7	(1x) 7.5	(1x) 200	(1x) 200	(1x) 40
PTE 1 009A-3 L-L1	3980	2810	1130	2737	2997	4530	25.7	(1x) 11.0	(1x) 200	(1x) 200	(1x) 40
PTE 1 009A-3 M-L1	3990	2820	1140	2737	2997	4530	28.1	(1x) 15.0	(1x) 200	(1x) 200	(1x) 40
PTE 1 009A-4 L-L1	4130	2970	1090	2737	2997	4835	23.9	(1x) 11.0	(1x) 200	(1x) 200	(1x) 40
PTE 1 009A-4 M-L1	4140	2970	1090	2737	2997	4835	26.1	(1x) 15.0	(1x) 200	(1x) 200	(1x) 40
PTE 1 009A-4 N-L1	4170	3010	1090	2737	2997	4835	27.9	(1x) 18.5	(1x) 200	(1x) 200	(1x) 40
PTE 1 012A-3 M-L1	4950	3330	1300	3651	2997	4607	34.1	(1x) 15.0	(1x) 200	(1x) 250	(1x) 40
PTE 1 012A-3 N-L1	4990	3360	1330	3651	2997	4607	36.5	(1x) 18.5	(1x) 200	(1x) 250	(1x) 40
PTE 1 012A-3 O-L1	5000	3380	1350	3651	2997	4607	38.6	(1x) 22.0	(1x) 200	(1x) 250	(1x) 40
PTE 1 012A-4 M-L1	5130	3510	1300	3651	2997	4911	31.9	(1x) 15.0	(1x) 200	(1x) 250	(1x) 40
PTE 1 012A-4 N-L1	5170	3540	1300	3651	2997	4911	34.2	(1x) 18.5	(1x) 200	(1x) 250	(1x) 40
PTE 1 012A-4 O-L1	5180	3560	1300	3651	2997	4911	36.0	(1x) 22.0	(1x) 200	(1x) 250	(1x) 40
PTE 1 009A-3 K-L2	7830	5500	1100	5480	2997	4835	45.4	(2x) 7.5	(2x) 200	(2x) 200	(2x) 40
PTE 1 009A-3 L-L2	7860	5540	1130	5480	2997	4835	51.5	(2x) 11.0	(2x) 200	(2x) 200	(2x) 40
PTE 1 009A-3 M-L2	7870	5550	1140	5480	2997	4835	56.2	(2x) 15.0	(2x) 200	(2x) 200	(2x) 40
PTE 1 009A-4 L-L2	8170	5840	1090	5480	2997	5445	47.9	(2x) 11.0	(2x) 200	(2x) 200	(2x) 40
PTE 1 009A-4 M-L2	8170	5850	1090	5480	2997	5445	52.1	(2x) 15.0	(2x) 200	(2x) 200	(2x) 40
PTE 1 009A-4 N-L2	8210	5880	1090	5480	2997	5445	55.7	(2x) 18.5	(2x) 200	(2x) 200	(2x) 40
PTE 1	9810	6560	1300	7328	2997	4911	68.3	(2x)	(2x)	(2x)	(1x) 40



012A-3 M-L2								15.0	200	250	
PTE 1 012A-3 N-L2	9840	6600	1330	7328	2997	4911	73.2	(2x) 18.5	(2x) 200	(2x) 250	(1x) 40
PTE 1 012A-3 O-L2	9860	6610	1350	7328	2997	4911	77.4	(2x) 22.0	(2x) 200	(2x) 250	(1x) 40
PTE 1 012A-4 M-L2	10170	6930	1300	7328	2997	5216	63.9	(2x) 15.0	(2x) 200	(2x) 250	(1x) 40
PTE 1 012A-4 N-L2	10200	6960	1300	7328	2997	5216	68.5	(2x) 18.5	(2x) 200	(2x) 250	(1x) 40
PTE 1 012A-4 O-L2	10220	6970	1300	7328	2997	5216	72.4	(2x) 22.0	(2x) 200	(2x) 250	(1x) 40
PTE 1 009A-3 K-L3	11710	8220	1100	8275	2997	5140	68.9	(3x) 7.5	(3x) 200	(3x) 200	(2x) 40
PTE 1 009A-3 L-L3	11750	8260	1130	8275	2997	5140	78.0	(3x) 11.0	(3x) 200	(3x) 200	(2x) 40
PTE 1 009A-3 M-L3	11760	8270	1140	8275	2997	5140	85.1	(3x) 15.0	(3x) 200	(3x) 200	(2x) 40
PTE 1 009A-4 L-L3	12200	8710	1090	8275	2997	5445	72.4	(3x) 11.0	(3x) 200	(3x) 200	(2x) 40
PTE 1 009A-4 M-L3	12210	8720	1090	8275	2997	5445	78.9	(3x) 15.0	(3x) 200	(3x) 200	(2x) 40
PTE 1 009A-4 N-L3	12240	8750	1090	8275	2997	5445	84.3	(3x) 18.5	(3x) 200	(3x) 200	(2x) 40
PTE 1 012A-3 M-L3	14660	9790	1300	11018	2997	5216	103.5	(3x) 15.0	(3x) 200	(3x) 250	(2x) 40
PTE 1 012A-3 N-L3	14690	9830	1330	11018	2997	5216	110.9	(3x) 18.5	(3x) 200	(3x) 250	(2x) 40
PTE 1 012A-3 O-L3	14710	9840	1350	11018	2997	5216	117.2	(3x) 22.0	(3x) 200	(3x) 250	(2x) 40
PTE 1 012A-4 M-L3	15200	10340	1300	11018	2997	5521	96.7	(3x) 15.0	(3x) 200	(3x) 250	(2x) 40
PTE 1 012A-4 N-L3	15240	10370	1300	11018	2997	5521	103.5	(3x) 18.5	(3x) 200	(3x) 250	(2x) 40
PTE 1 012A-4 O-L3	15250	10390	1300	11018	2997	5521	109.4	(3x) 22.0	(3x) 200	(3x) 250	(2x) 40